
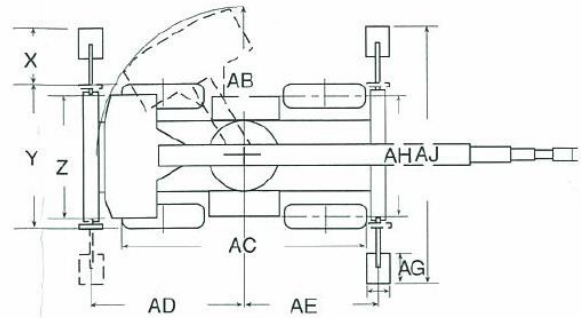


Galion 150 Series Crane

DIMENSIONS & RATINGS MODEL 150A

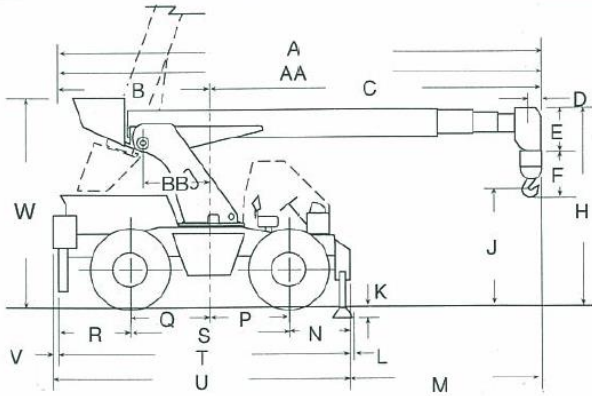


Dimensions

Ft./inches (mm)		Ft./inches (mm)	
A	27' 2" (8280) [3-Section]	Q	4' 9" (1448)
AA	29' 6" (8992) [4-Section]	R	3' 10½" (1181)
B	7' 9" (2362)	S	9' 0" (2743)
BB	3' 10" (1168)	T	16' 3½" (2426)
C	18' 2" (5537) [3-Section]	U	16' 10½" (5144)
CC	20' 6" (6248) [4-Section]	V	3-1/2" (89)
D	7" (178)	W	11' 2½" (3416)
E	2' 3½" (699)	X	3' 0¼" (920)
F	2' 5½" (749)	Y	6' 6" (1981)
G	6' 4" (1930)	Z	4' 11½" (1511)
H	11'1" (3378)	AB	7' 9" (2362)
J	6' 6¾" (2000)	AC	13' 5" (4089)
K	6½" (165)	AD	8' 3" (2514)
L	3½" (89)	AE	7' 3½" (2223)
M	10' 3½" (3137) [3-Section]	AF	16" (406)
MM	13' 7½" (4153) [4-Section]	AG	20" (508)
N	3' 9" (1143)	AH	6' 9" (2057)
P	4' 3" (1295)	AJ	14' 2½" (4331)

Working Ranges

Range of 3-section boom shown in black, 4-section boom shown in color.

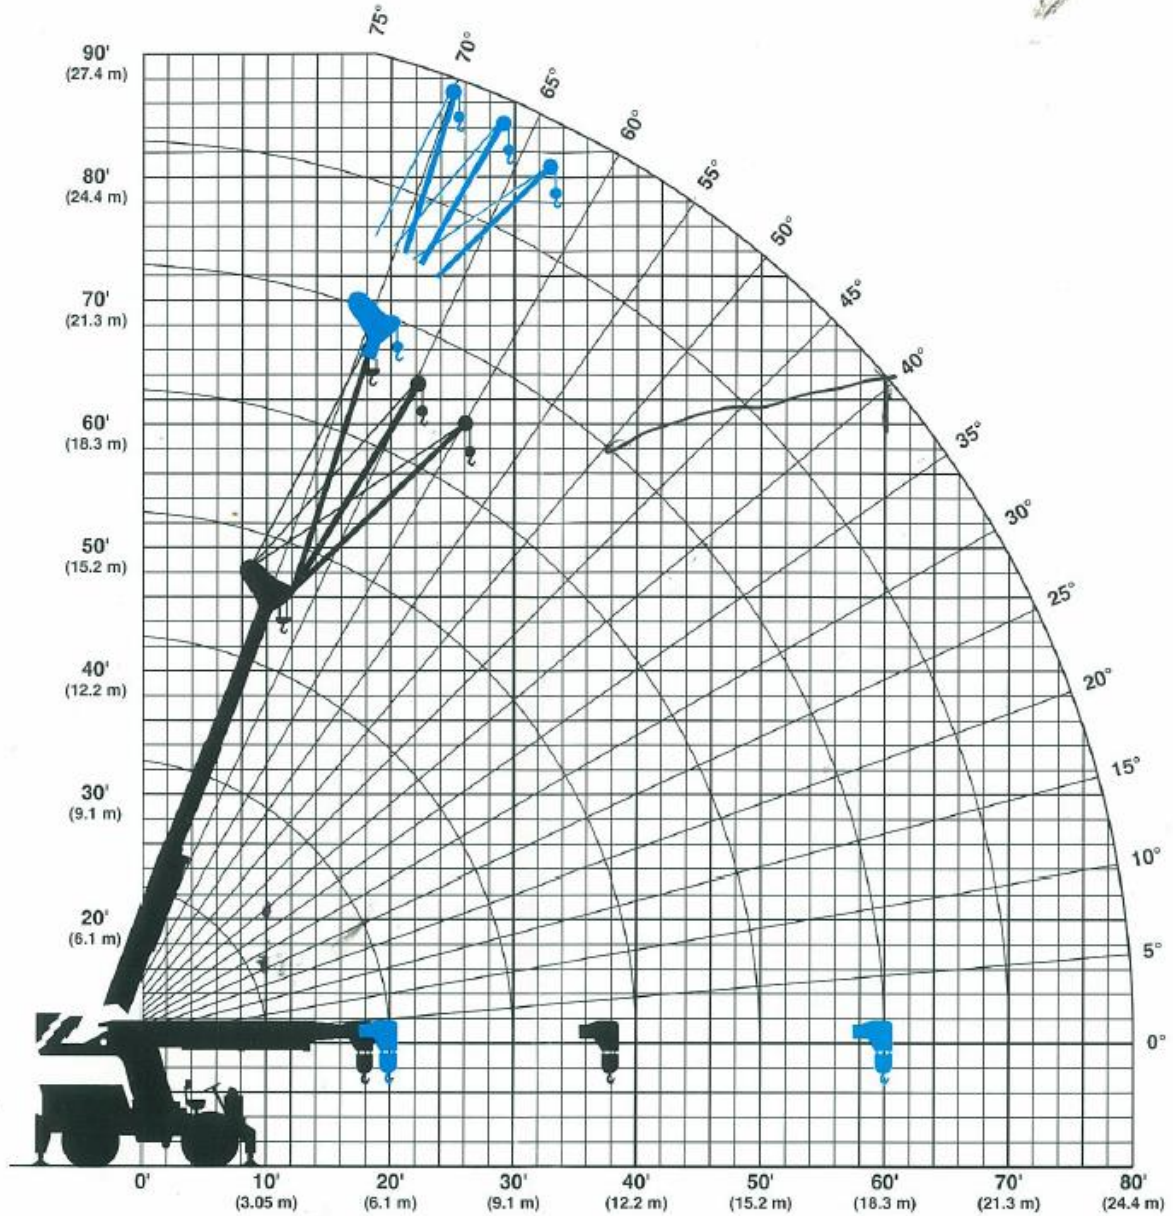

Onze middelen en onze filosofie garanderen uw resultaat!

HEMBERG MONTAGE bv | Twaalfapostelenstraat 2 | 9051 Sint-Denijs-Westrem | Tel: +32(0)9 222 16 32
info@hembergmontage.be | www.hembergmontage.be | BTW: BE 0400.150.437 | Bank: BE07 2900 1340 0266

Model 150 Series A hydraulic mobile crane. Based on 85% Tipping (75% without outriggers)—Crane on firm level surface.

3-Section power boom load in lbs.

Working Radius in feet	360° Rotation		Off Front
	Without Outriggers	With Outriggers	Without Outriggers
10	18400	30000	30000
12	13200	28500	19900
14	10200	25000	15750
16	8250	21875	12750
18	6850	18950	10550
20	5800	15750	9000
22	5000	13340	7700
24	4300	11580	6750
26	3750	10240	6000
28	3350	9180	5250
30	3000	8240	4800
32	2600	7480	4300
34	2350	6800	3850
36	2100	6200	3500

4-Section power boom load in lbs.

Working Radius in feet	360° Rotation		Off Front
	Without Outriggers	With Outriggers	Without Outriggers
10	18500	30000	30000
12	13500	28500	20600
14	10650	25000	15800
15	9450	23300	14600
16	8650	21850	12550
18	7000	18250	10500
20	5500	15500	8600
22	4500	13150	7250
24	3700	11250	6300
25	3350	10400	5800
30	2150	7350	3800
35	1500	5700	2800
40	1100	4600	2250
45	750	3750	1800
50	-	3100	1500
55	-	2550	1100
60	-	2100	850